

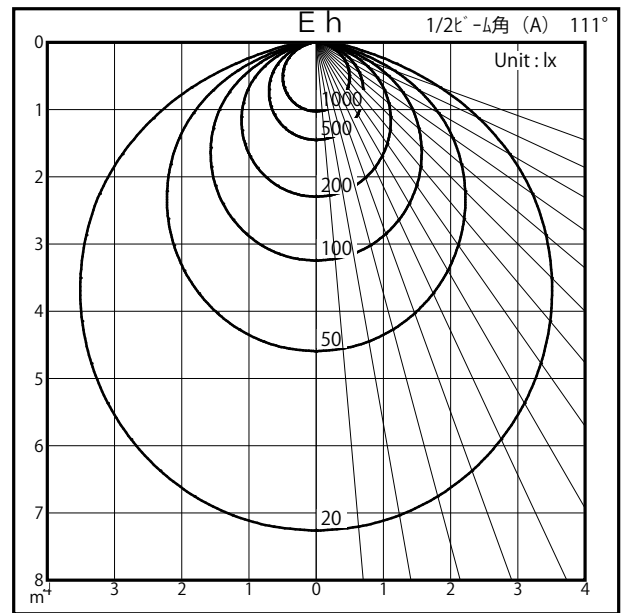


配光特性

図番 YL260037

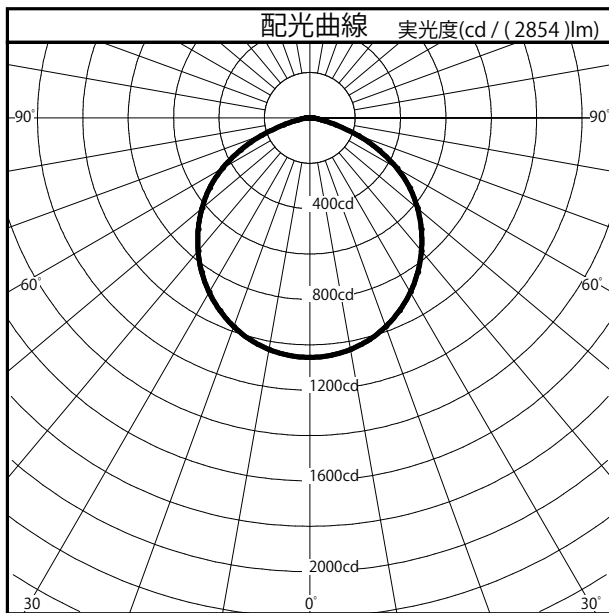

商品番号	04LK-22B7-ZB	
カタログ番号	324L1070B+320X-232	
商品名	BAUMN® LED CEILING LAMP	
色温度	6200 K	
	2700K=50%, 6200K=100%, 6500K=100%	
器具光束	2854.0	lm _{1.000}
下方効率	99.9 %	
上方効率	0.1 %	
最大取付間隔		
A 断面	1.25 H	
C 断面		
B 断面		

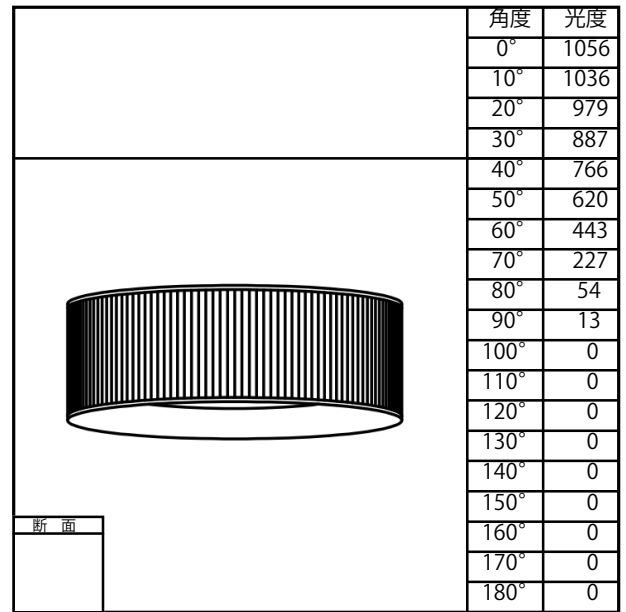

照明率表		平均照度=台数*照明率*保守率*2854(光束)/(間口*奥行)													
		20													
床面反射率 (%)		0													
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.39	0.31	0.26	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.26	0.24	
	0.70	0.52	0.43	0.37	0.50	0.43	0.37	0.49	0.42	0.37	0.47	0.41	0.36	0.34	
	1.00	0.66	0.57	0.51	0.64	0.56	0.50	0.62	0.55	0.50	0.60	0.54	0.49	0.47	
	1.25	0.74	0.66	0.60	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.61	0.57	0.55	
	1.50	0.80	0.72	0.66	0.77	0.70	0.65	0.75	0.69	0.64	0.72	0.67	0.63	0.61	
	指	2.00	0.88	0.81	0.76	0.85	0.79	0.74	0.82	0.77	0.73	0.79	0.75	0.71	0.69
		2.50	0.94	0.88	0.83	0.90	0.85	0.81	0.87	0.82	0.79	0.84	0.80	0.77	0.74
		3.00	0.97	0.92	0.87	0.93	0.89	0.85	0.90	0.86	0.83	0.87	0.83	0.81	0.78
		4.00	1.03	0.98	0.94	0.98	0.95	0.91	0.94	0.91	0.89	0.91	0.88	0.86	0.83
		5.00	1.06	1.02	0.98	1.01	0.98	0.95	0.97	0.95	0.92	0.93	0.91	0.89	0.86
数	7.00	1.09	1.06	1.04	1.05	1.02	1.00	1.00	0.98	0.96	0.96	0.95	0.93	0.90	
	10.00	1.12	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.97	0.96	0.93	