



配光特性

図番 YL260038



商品番号	04LK-22B7-ZW	
カタログ番号	324L1070W+320X-232	
商品名	BAUMN® LED CEILING LAMP	
色温度	6200 K	
2700K=50%, 6200K=100%, 6500K=100%		
器具光束	3755.0	lm _{1.000}
下方効率	98.8 %	
上方効率	1.2 %	
最大取付間隔		
A 断面	1.31 H	
C 断面		
B 断面		

	角度	光度
	0°	1109
	10°	1094
	20°	1052
	30°	980
	40°	880
	50°	755
	60°	593
	70°	389
	80°	221
	90°	170
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

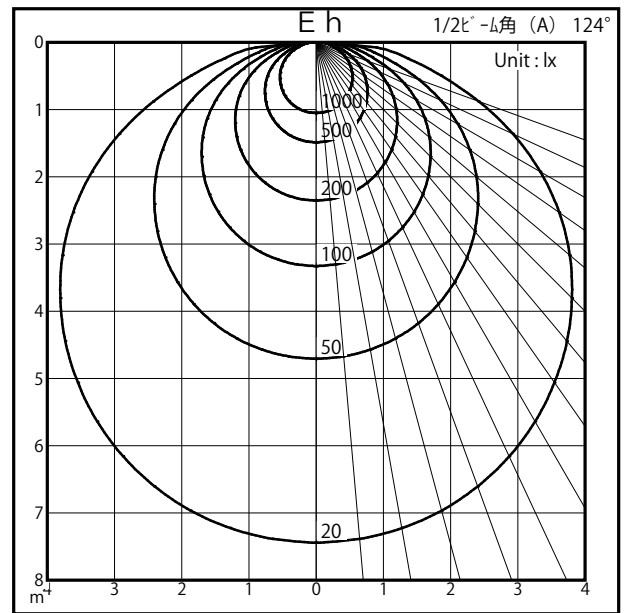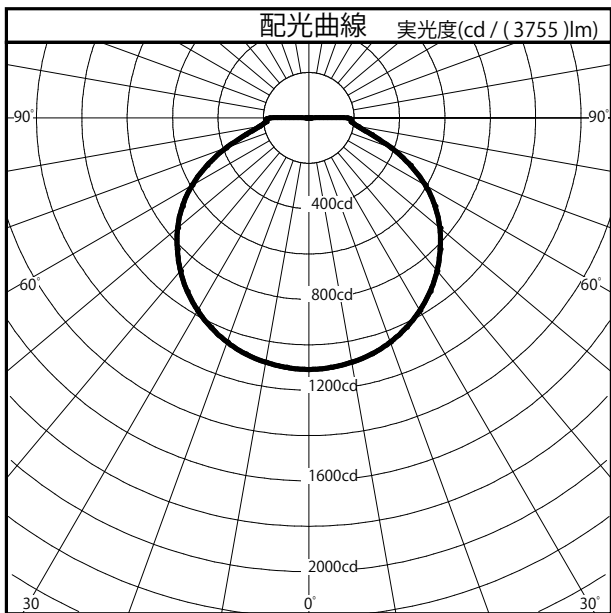

照明率表		平均照度=台数×照明率×保守率×3755(光束)/(間口×奥行)													
		20													
床面反射率 (%)		0													
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.36	0.27	0.22	0.35	0.27	0.22	0.34	0.27	0.22	0.33	0.26	0.21	0.20	
	0.70	0.47	0.38	0.32	0.46	0.38	0.32	0.44	0.37	0.31	0.43	0.36	0.31	0.29	
	1.00	0.61	0.51	0.45	0.58	0.50	0.44	0.56	0.49	0.43	0.54	0.48	0.43	0.40	
	1.25	0.69	0.60	0.53	0.66	0.58	0.52	0.63	0.56	0.51	0.61	0.55	0.50	0.47	
	1.50	0.75	0.66	0.59	0.71	0.64	0.58	0.69	0.62	0.57	0.66	0.60	0.56	0.53	
	指	2.00	0.83	0.75	0.69	0.79	0.73	0.67	0.76	0.70	0.65	0.73	0.68	0.64	0.61
		2.50	0.89	0.81	0.75	0.85	0.79	0.73	0.81	0.76	0.72	0.78	0.73	0.70	0.67
		3.00	0.93	0.86	0.80	0.88	0.83	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.70
		4.00	0.98	0.93	0.88	0.94	0.89	0.85	0.89	0.86	0.82	0.86	0.82	0.80	0.76
	数	5.00	1.02	0.97	0.92	0.97	0.93	0.89	0.93	0.89	0.86	0.88	0.86	0.83	0.80
7.00		1.06	1.02	0.98	1.01	0.98	0.95	0.96	0.94	0.91	0.92	0.90	0.88	0.84	
	10.00	1.09	1.06	1.04	1.04	1.02	0.99	0.99	0.97	0.95	0.95	0.93	0.92	0.88	