



# 配光特性

図番 MR140337

|         |                                |
|---------|--------------------------------|
| カタログ番号  | J519AN                         |
| オプション番号 | 2700K Ra85                     |
| 使用ランプ   | BLM-1120-27853                 |
| ランプ光束   | 3700.0 lm <small>1,000</small> |
| 器具効率    | 71.9 %                         |
| 下方効率    | 71.9 %                         |
| 上方効率    | 0.0 %                          |
| 最大取付間隔  |                                |
| A断面     | 0.25 H                         |
| C断面     |                                |
| B断面     |                                |



| G.E.M. DL-FLOOD | 角度   | 光度    |
|-----------------|------|-------|
|                 | 0°   | 15715 |
|                 | 10°  | 4352  |
|                 | 20°  | 1200  |
|                 | 30°  | 1077  |
|                 | 40°  | 722   |
|                 | 50°  | 4     |
|                 | 60°  | 1     |
|                 | 70°  | 1     |
|                 | 80°  | 2     |
|                 | 90°  | 0     |
|                 | 100° | 0     |
|                 | 110° | 0     |
|                 | 120° | 0     |
|                 | 130° | 0     |
|                 | 140° | 0     |
|                 | 150° | 0     |
|                 | 160° | 0     |
|                 | 170° | 0     |
|                 | 180° | 0     |

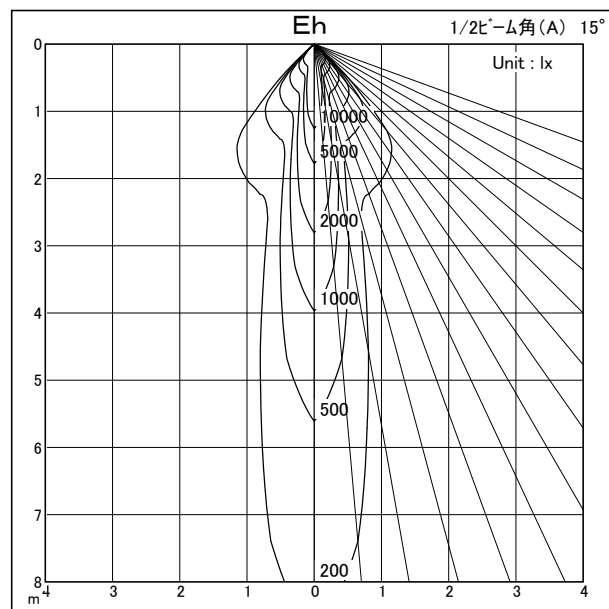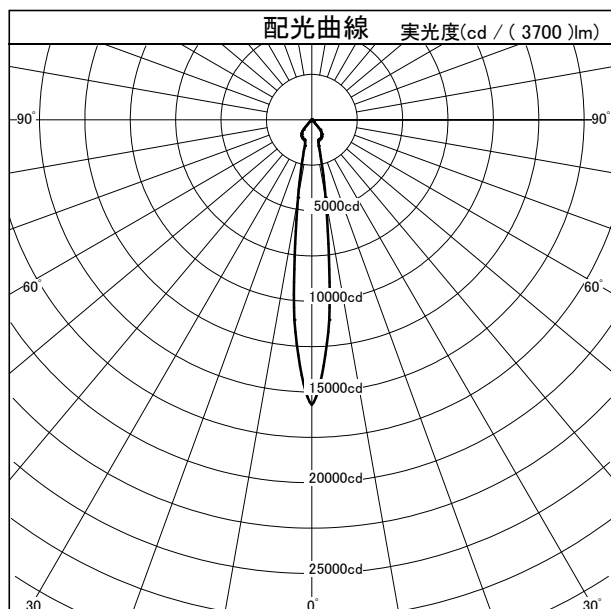

| 照 明 率 表     |       | 平均照度=台数×照明率×保守率×3700(光束)/(間口×奥行) |      |      |      |      |      |      |      |      |      |      |      |
|-------------|-------|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| 床面反射率(%)    |       | 20                               |      |      |      |      |      |      |      |      |      |      |      |
| 天井面反射率(%)   |       | 0                                |      |      |      |      |      |      |      |      |      |      |      |
| 壁面反射率(%)    |       | 0                                |      |      |      |      |      |      |      |      |      |      |      |
| 室<br>指<br>数 | 0.50  | 0.52                             | 0.49 | 0.47 | 0.52 | 0.49 | 0.47 | 0.51 | 0.49 | 0.46 | 0.51 | 0.48 | 0.46 |
|             | 0.70  | 0.60                             | 0.56 | 0.54 | 0.59 | 0.56 | 0.53 | 0.58 | 0.55 | 0.53 | 0.57 | 0.55 | 0.52 |
|             | 1.00  | 0.66                             | 0.63 | 0.60 | 0.65 | 0.62 | 0.60 | 0.64 | 0.61 | 0.59 | 0.63 | 0.60 | 0.58 |
|             | 1.25  | 0.69                             | 0.66 | 0.64 | 0.68 | 0.65 | 0.63 | 0.66 | 0.64 | 0.62 | 0.65 | 0.63 | 0.60 |
|             | 1.50  | 0.72                             | 0.69 | 0.66 | 0.70 | 0.67 | 0.65 | 0.68 | 0.66 | 0.64 | 0.67 | 0.65 | 0.62 |
|             | 2.00  | 0.75                             | 0.72 | 0.70 | 0.73 | 0.70 | 0.69 | 0.71 | 0.69 | 0.67 | 0.69 | 0.67 | 0.64 |
|             | 2.50  | 0.77                             | 0.74 | 0.72 | 0.74 | 0.72 | 0.71 | 0.72 | 0.70 | 0.69 | 0.70 | 0.69 | 0.66 |
|             | 3.00  | 0.78                             | 0.76 | 0.74 | 0.75 | 0.73 | 0.72 | 0.73 | 0.71 | 0.70 | 0.71 | 0.70 | 0.67 |
|             | 4.00  | 0.80                             | 0.78 | 0.76 | 0.77 | 0.75 | 0.74 | 0.74 | 0.73 | 0.72 | 0.72 | 0.71 | 0.68 |
|             | 5.00  | 0.81                             | 0.79 | 0.78 | 0.78 | 0.77 | 0.76 | 0.75 | 0.74 | 0.73 | 0.73 | 0.72 | 0.69 |
| 数           | 7.00  | 0.82                             | 0.81 | 0.80 | 0.79 | 0.78 | 0.77 | 0.76 | 0.75 | 0.75 | 0.73 | 0.73 | 0.70 |
|             | 10.00 | 0.83                             | 0.82 | 0.82 | 0.80 | 0.79 | 0.78 | 0.77 | 0.76 | 0.76 | 0.74 | 0.73 | 0.70 |