

Luminaire

Code M324620
 Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Measur.


Code FTS1602825
 Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Lamps Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 150 mm Diam. 120 mm	Height	137 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.011310 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.000000 m2 0.000000 m2 0.002736 m2	
Coordinate system	CG	Symmetry Type				Rotosymmetrical	
Date	04-03-2015	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				1727.19 lm	

LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 97 100 100 100 100
 F UTE --

D DIN 5040
 B NBN
 A60
 BZ 1

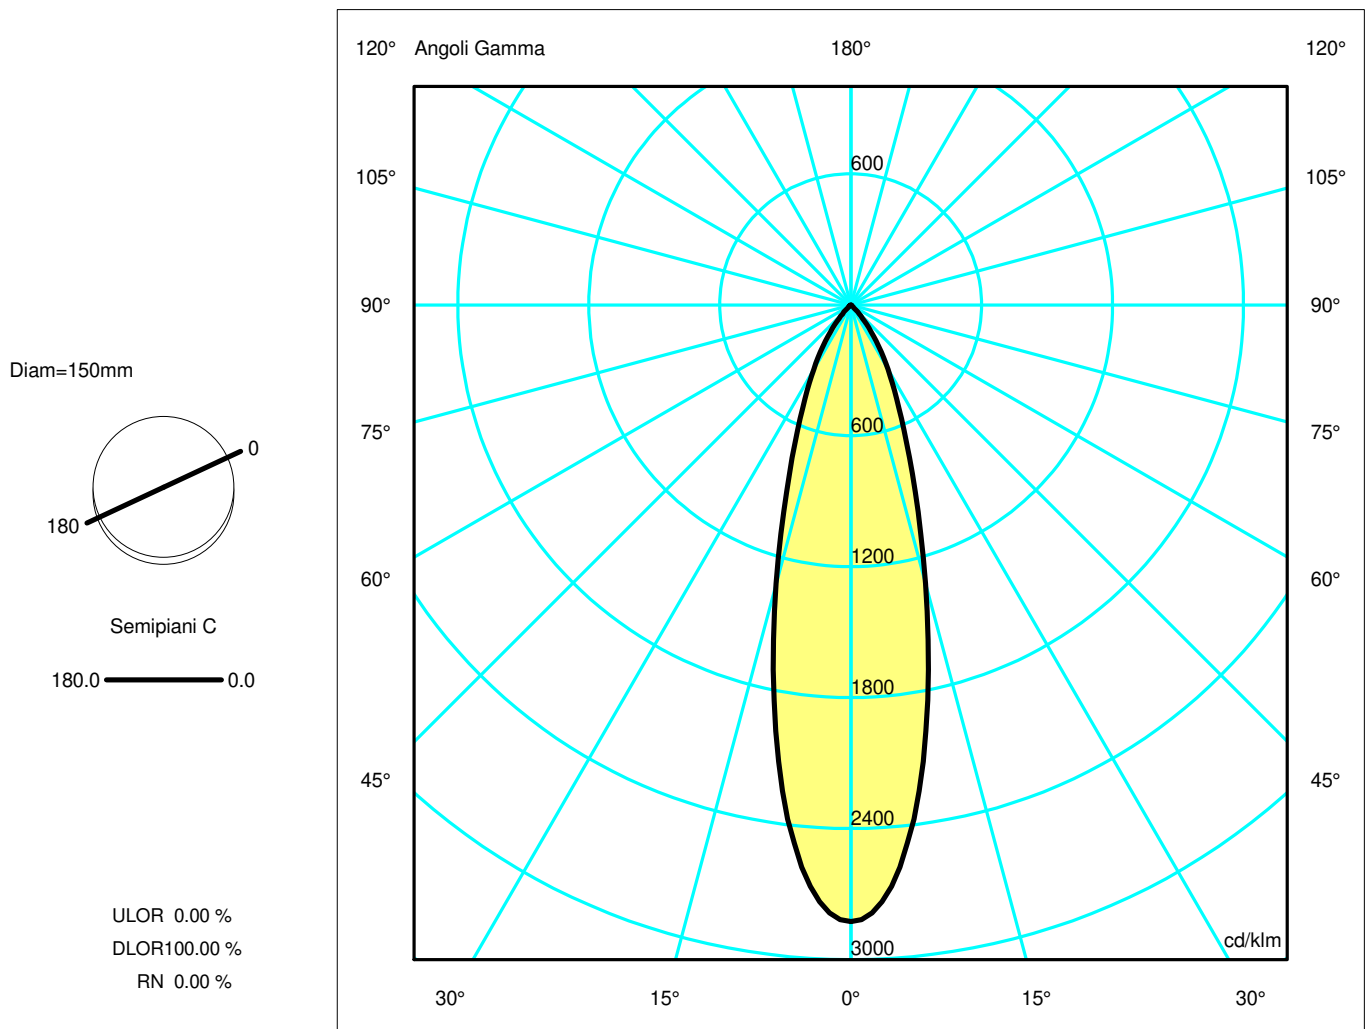

Luminaire

Code M324620
Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Measurerm.


Code FTS1602825
Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Lamps Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area	0.011310 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.002736 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	04-03-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1727.19 lm		
LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.51	0.76	1.02	1.27	OC	0.25	0.51	0.76	1.02	1.27
OB	0.25	0.51	0.76	1.02	1.27	OD	0.25	0.51	0.76	1.02	1.27

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OB	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OC	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OD	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07

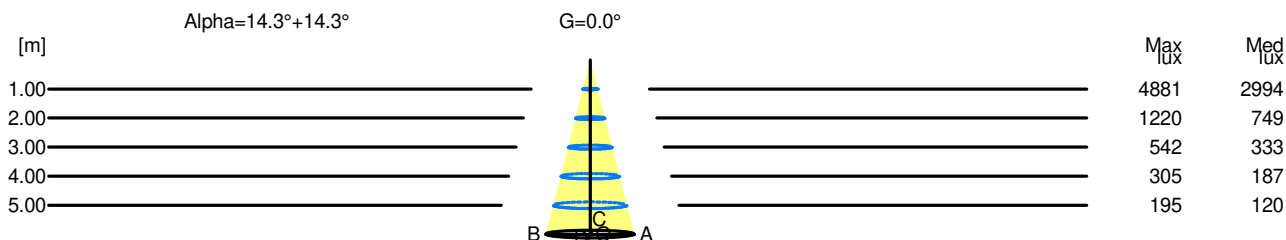

H[m]	D[m]	Max lux	Med lux	Alpha=14.3°+14.3°	G=0.0
1.00	0.51	4881	2994		
2.00	1.02	1220	749		
3.00	1.53	542	333		
4.00	2.03	305	187		
5.00	2.54	195	120		