


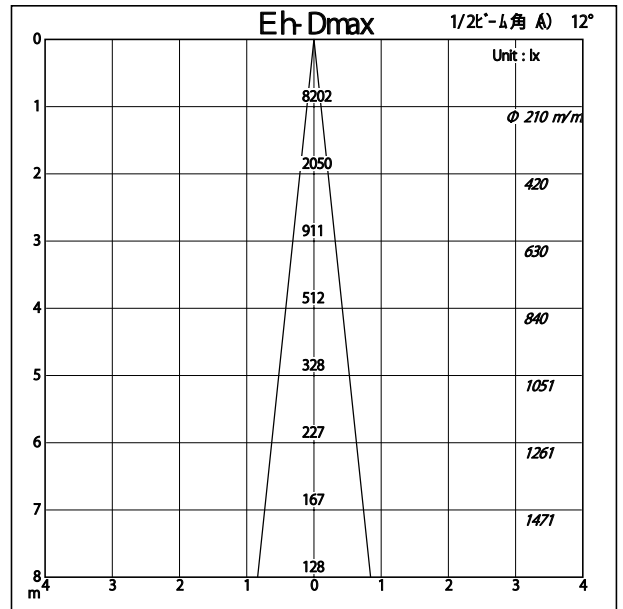
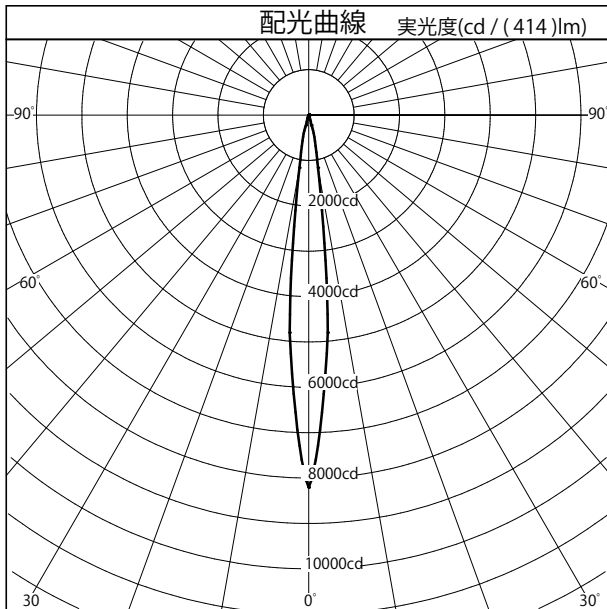
配光特性

図番 YL230175



カタログ番号	YZ343(B・W)		
使用ランプ			
器具光束	414.0	lm	1.000
最大光度	8202.6	cd	
1 / 2 ビーム角			
A 断面	12.00 °		
C 断面			
B 断面			

	角度	光度
	0°	8203
	10°	1178
	20°	21
	30°	0
	40°	0
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	




照明率表		平均照度=台数*照明率*保守率* 414 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	1.06	1.04	1.03	1.06	1.04	1.03	1.05	1.04	1.02	1.05	1.03	1.02	1.02
	0.70	1.08	1.06	1.04	1.08	1.06	1.04	1.07	1.05	1.04	1.06	1.04	1.03	1.02
	1.00	1.11	1.08	1.07	1.09	1.07	1.06	1.08	1.06	1.05	1.07	1.05	1.04	1.03
	1.25	1.12	1.10	1.08	1.10	1.08	1.07	1.09	1.07	1.06	1.07	1.06	1.05	1.03
	1.50	1.14	1.11	1.09	1.11	1.09	1.08	1.09	1.08	1.06	1.07	1.06	1.05	1.03
指	2.00	1.15	1.13	1.11	1.12	1.11	1.09	1.10	1.09	1.07	1.07	1.06	1.06	1.03
	2.50	1.17	1.15	1.13	1.13	1.12	1.10	1.10	1.09	1.08	1.08	1.07	1.06	1.04
	3.00	1.18	1.16	1.14	1.14	1.13	1.11	1.11	1.10	1.09	1.08	1.07	1.06	1.04
	4.00	1.19	1.17	1.16	1.15	1.14	1.13	1.11	1.10	1.10	1.08	1.07	1.07	1.04
	5.00	1.20	1.18	1.17	1.15	1.14	1.13	1.12	1.11	1.10	1.08	1.07	1.07	1.04
数	7.00	1.21	1.20	1.19	1.16	1.15	1.15	1.12	1.11	1.11	1.08	1.08	1.07	1.04
	10.00	1.22	1.21	1.20	1.17	1.16	1.16	1.12	1.12	1.11	1.08	1.08	1.08	1.04



配光特性

図番 YL230176



カタログ番号	YZ343(B・W)		
使用ランプ			
器具光束	491.0	lm	1.000
最大光度	9332.4	cd	
1 / 2 ビーム角			
A 断面	12.00 °		
C 断面			
B 断面			

	角度	光度
	0°	9332
	10°	1416
	20°	31
	30°	0
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

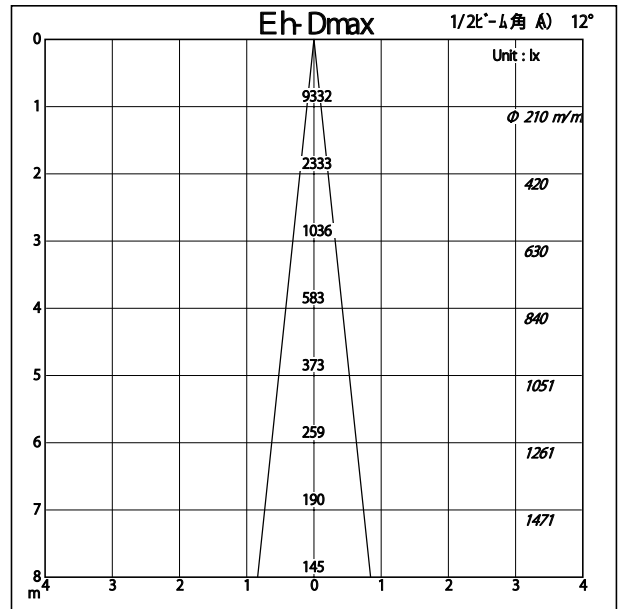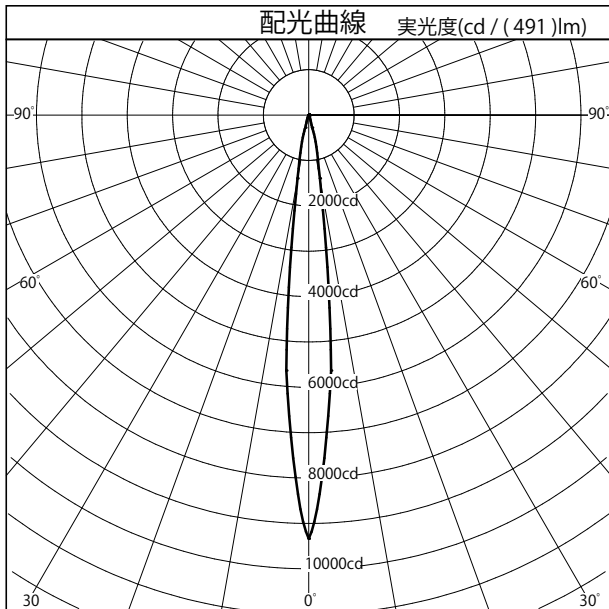

照明率表		平均照度=台数*照明率*保守率* 491 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	1.05	1.03	1.02	1.05	1.03	1.02	1.04	1.02	1.01	1.04	1.02	1.01	1.01
	0.70	1.07	1.05	1.03	1.06	1.04	1.03	1.06	1.04	1.02	1.05	1.03	1.02	1.01
	1.00	1.10	1.07	1.05	1.08	1.06	1.05	1.07	1.05	1.04	1.05	1.04	1.03	1.02
	1.25	1.11	1.09	1.07	1.09	1.07	1.06	1.07	1.06	1.05	1.06	1.05	1.03	1.02
	1.50	1.12	1.10	1.08	1.10	1.08	1.07	1.08	1.06	1.05	1.06	1.05	1.04	1.02
指	2.00	1.14	1.12	1.10	1.11	1.10	1.08	1.09	1.07	1.06	1.06	1.05	1.04	1.02
	2.50	1.15	1.13	1.12	1.12	1.11	1.09	1.09	1.08	1.07	1.07	1.06	1.05	1.02
	3.00	1.16	1.15	1.13	1.13	1.11	1.10	1.10	1.09	1.08	1.07	1.06	1.05	1.03
	4.00	1.18	1.16	1.15	1.14	1.13	1.11	1.10	1.09	1.08	1.07	1.06	1.06	1.03
	5.00	1.19	1.17	1.16	1.14	1.13	1.12	1.10	1.10	1.09	1.07	1.06	1.06	1.03
数	7.00	1.20	1.19	1.18	1.15	1.14	1.13	1.11	1.10	1.10	1.07	1.07	1.06	1.03
	10.00	1.20	1.20	1.19	1.16	1.15	1.14	1.11	1.11	1.10	1.07	1.07	1.07	1.03